

Installation Instructions

Midi Windshield

ABA-3Y606-00-00 SR250 G/H/TH, XS400 G/SG/H/SH

1. Foreward -- Warning:

Please read and understand instruction sheets completely before installation to avoid any possible damage to yourself, the motorcycle, or the accessory. These instructions contain important information for future reference and must be given to the customer.

2. Parts List:

PARTS LIST

Item	Part Name	Part Number	Description	Qty.
1	Windscreen			1
2	Bracket L			1
3	Bracket R			1
4	Grommet			4
5	Collar		Small	4
6	Washer, Dished			8
7	Screw Cross Recessed Truss Head		No. 10-24 x 3/4" LG	4
8	Bolts, Button Socket Head		M8 x 1.25 x 45mm LG	4
9	Collar		Big	4

3. Motorcycle Preparation:


- a) Place the motorcycle on its center-stand.

4. Midi Windshield Bracket Installation

- a. Remove all plastic caps from the top of Handlebar Clamp Bolts.
- b. Remove the left side handlebar clamp bolts and place the collars (Item 8) in the counter bores on the clamp.
- c. Install the left bracket (Item 2) on the collars, and tighten it down using button-socket bolts (Item 8). 210 kg-cm (15 ft-lbs)

NOTE: The handlebar clamp has off-set legs, the longer leg should be directed to front and tightened first. See **Photo A**.

- d) Install the right side bracket (Item 3). Repeat Step a) through c).

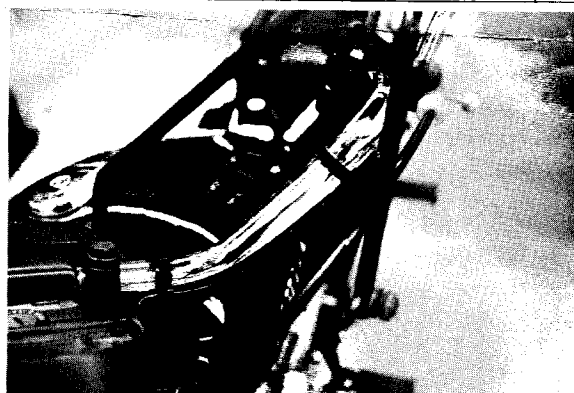

NOTE: In the case of XS400. The handle bar clamp does not have counter bores, remove the bolts and place the brackets (Item 2 & 3) on the plain washers. The collar (Item 9) is not required.

5. Windscreen Installation

- a) Install the grommets (Item 4) into the mounting holes on the windscreen (Item 1).

- b) Mount the windscreen to the brackets using the collars (Item 5) placed in the grommets, the washers (Item 6) on both sides of the grommets and the screws (Item 7).

NOTE: Each bracket has four (4) threads. The top and third (3rd) thread is used to mount the windscreen for XS400, and the second (2nd) and fourth (4th) thread is for SR250.

- c) Tighten the screws 50 kg-cm (4 ft-lb)

6. Check Fitting

- a) Check the **tightness of all fasteners.**
- b) Inspect the routing of wires whether they are proper or not.

7. Customer Service

For more information regarding installation, please call your YAMAHA dealer.

8. Maintenance:

- a) **Periodical Check:**
Check periodically all fasteners for wear and tightness.
- b) **Cleaning:**
Wash the windshield by using a soft flannel cloth and an acrylic plastic cleaner (or a solution of mild soap or detergent and plenty of water). Do not clean the windshield with an abrasive cleaner, gasoline or solvent as these materials cause deterioration of the windshield material.
- c) **Polishing:**
Polish the windshield frequently to keep clear vision with a fine grade of acrylic plastic polish and a clean soft flannel cloth.
- d) **Replacement:**
Replace the windshield as soon as accumulated scratches obscure the visibility or the windshield is damaged.

WARNING:

NEVER OVERLOAD YOUR MOTORCYCLE. DO NOT CARRY LOOSELY PACKED ITEMS THAT CAN SHIFT WHILE YOU ARE RIDING. DISTRIBUTE WEIGHT EVENLY FROM SIDE TO SIDE.

Securely pack your heaviest items close to the center of the machine. Properly adjust your suspension settings and check the condition and inflation pressure of your tires.

When using Genuine Yamaha Accessories DO NOT EXCEED THE FOLLOWING ACCESSORY PAYLOAD LIMITS:

Frame Mount Fairing	15 lb. max.
Sport Fairing	0 lb. max.
Engine Guard	0 lb. max.
Wide Saddlebags	15 lb. per bag
Narrow Saddlebags	10 lb. per bag
Luggage Racks	30 lb. max.
Travel Trunks	20 lb. max.

Further Considerations For Safe Motorcycling

Do not ride the motorcycle with severely scratched or cracked windshield.

Unauthorized modification on the accessories is not allowed. It may cause damage to the accessory itself, the motorcycle, or the rider and warranty coverage on the motorcycle and/or the accessories may be disallowed.

The drivability of a motorcycle with a fairing may be different than without a fairing. If you do not have experience riding a motorcycle with a fairing, practice until you are comfortable with the fairing before riding on the highway.

The Saddlebag System adds considerable width to the rear of the motorcycle. Care in maneuvering should be taken when riding the motorcycle with saddlebags to allow sufficient clearance between the motorcycle and other objects. Never ride the motorcycle with one bag only.